




CONVEYING & AUTOMATION

3 Panel conveyor

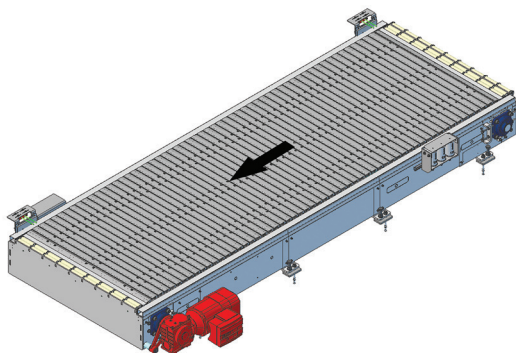

This conveyor is designed for the transport of flexible packages or items on such carriers as paper pallets or plastic boards. This type of conveyor uses anodised aluminium panels profiled in the shape of a cartridge case ensuring the minimum gap between panels (no larger than 5 mm in accordance with PN-EN 619+A1:2011). With this solution it is possible to transport the material both with and without boards. Thanks to the modularity of the panels, individual elements can be easily and quickly replaced in the event of damage. It is also possible to select the option with an automatic central lubrication system, thus increasing the durability of the device.

**THE CONVEYOR IS REGISTERED IN THE PATENT
AND TRADEMARK OFFICE**

Advantages of panel conveyor:

- the use of energy-efficient engines,
- safety of use,
- without shock transporting the product,
- the transport without risk of damage to the product and carrier.

SPECIFICATIONS

* The values refer to standard devices.
We carry out projects according to specific customer requirements.

Drive	P	1,1 kW
Speed	V	12 m / min
Load	Q	1500 kg
Load per panel	Qp	150 kg
Panel width	L	1000 lub 2000 mm
Range of conveyor length	L	2000-6000 mm
Working height	H	300 mm



WUWER Sp. z o.o.
ul. Gen. Hallera 18a
PL- 41-709 Ruda Śląska

Telephone: (+48) 32 244 99 70
Telefax: (+48) 32 24 499 90
E-Mail: kontakt@wuwer.pl

WUWER Fördertechnik und Automation
Weltenschwanner Straße 29
D-75385 Bad Teinach - Zavelstein

Telephone: (+49) 7053 92650
Telefax: (+49) 7053 926520
E-Mail: info@wuwer.de

www.wuwer.de

