




# CONVEYING & AUTOMATION

## 5 Angle conveyor

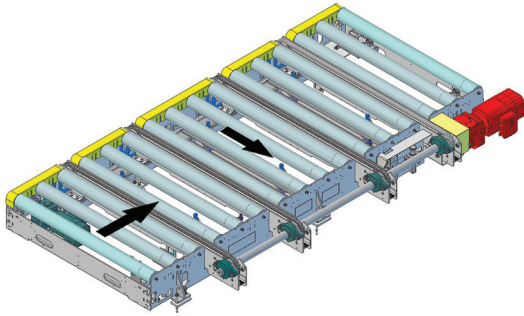

This conveyor is designed to change the flow of material by 90 degrees. It makes it possible to place packages in an axis of the line of conveyors or on the side reference line. It helps to increase the efficiency of the handling line by saving space thanks to the coordinated movements of the device. The conveyor can be manufactured as a driven or non-driven device.

This type of conveyor is composed of two types of devices: usually a roller conveyor and a transversely installed chain conveyor. The lifting of the chain conveyor can be implemented using a mechanical, hydraulic or pneumatic drive. It is possible to install the conveyor on a trolley, turntable or lifting table.

### Advantages of angle conveyors:

- Ease of adapting on other handling equipment,
- Grouping and separating of material,
- Straightening packages,
- Can be installed on a small surface.

### SPECIFICATIONS

\* The values refer to standard devices.  
We carry out projects according to specific customer requirements.

Minimum height	H	300 mm
Load	Q	Up to 10,000 kg
Maximum length	L	6000 mm
Standard width	RL	1200; 2400; 2500 mm



WUWER Sp. z o.o.  
ul. Gen. Hallera 18a  
PL- 41-709 Ruda Śląska

Telephone: (+48) 32 244 99 70  
Telefax: (+48) 32 24 499 90  
E-Mail: kontakt@wuwer.pl

WUWER Fördertechnik und Automation  
Weltenschwanner Straße 29  
D-75385 Bad Teinach - Zavelstein

Telephone: (+49) 7053 92650  
Telefax: (+49) 7053 926520  
E-Mail: info@wuwer.de

[www.wuwer.de](http://www.wuwer.de)

